


Rubber Pads & Super K Corks

10" x 10"
Section
Shown

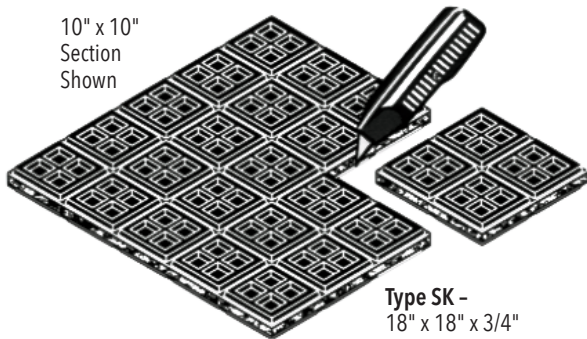

Type SK -
18" x 18" x 3/4"

The all-rubber Super W pad is usually the best pad for isolating vibration. However, many contractors are used to the cork and rubber composite pad and are hesitant to change. We have a new anti-vibration cork and rubber pad, the Super K, that is a great improvement over what's out there now. A lower duro rubber, glued to both sides of a cork core, gives the equipment a quieter ride. The vibration isolation pad's modular 2'x2' design with a thin membrane between allows the contractor to easily cut and separate the Super K pad with a box cutter or utility knife for just the size he needs.

Test Reports & Additional Information Can be Found at:

https://www.acousticalsurfaces.com/mounts_springs/super_k.htm

Super K Load Rating (per Square)

Type & Size	Load per 2"x2" square (lbs)	Rated Defl. (in)
Super K Pad - 18"x18"x3/4"	200	.07



ACOUSTICAL | SURFACES, INC.

Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com

IMF Simple Spring Mounts - Unhoused

IMF 1" DEFLECTION - NO-ADJUSTMENT SPRING MOUNTS*

Type & Size	Rated Capacity	Rated Deflection	Mount Constant	Spring Color/Stripe	A	Dimensions B	Free Height
IMF-X-12	12 lbs	1.25"	10 lbs/in	Orange			
IMF-X-23	23 lbs	1.30"	18 lbs/in	Brown			
IMF-X-33	33 lbs	1.10"	30 lbs/in	Red			
IMF-X-54	54 lbs	1.20"	45 lbs/in	White			
IMF-X-76	76 lbs	1.02"	73 lbs/in	Black	2"	7/16"	2-3/4"
IMF-X-113	113 lbs	1.00"	113 lbs/in	Yellow			
IMF-X-130	130 lbs	1.00"	130 lbs/in	Purple			
IMF-X-175	175 lbs	1.00"	175 lbs/in	Silver			
IMF-X-210	210 lbs	1.00"	210 lbs/in	Blue			
IMF-A-12	12 lbs	1.00"	12 lbs/in	Red			
IMF-A-18	18 lbs	1.00"	18 lbs/in	Gray	2-1/8"	7/16"	2-1/4"
IMF-A-25	25 lbs	1.00"	25 lbs/in	Orange			
IMF-A-45	45 lbs	1.60"	28 lbs/in	Blue			
IMF-A-75	75 lbs	1.50"	50 lbs/in	Orange			
IMF-A-125	125 lbs	1.33"	94 lbs/in	Brown	2-1/8"	7/16"	3-3/8"
IMF-A-200	200 lbs	1.15"	174 lbs/in	Black			
IMF-A-310	310 lbs	1.00"	310 lbs/in	Yellow			
IMF-A-400	400 lbs	1.00"	400 lbs/in	Green			
IMF-A-510	510 lbs	1.00"	210 lbs/in	Red	2-1/8"	7/16"	3-3/4"
IMF-A-625	625 lbs	1.00"	625 lbs/in	White			

3/4" Minimum Deflection*

IMF 2" DEFLECTION - NO-ADJUSTMENT SPRING MOUNTS*

Type & Size	Rated Capacity	Rated Deflection	Mount Constant	Spring Color/Stripe	A	Dimensions B	Free Height
IMF-B-20	20 lbs	2.40"	8 lbs/in	Tan			
IMF-B-26	26 lbs	2.18"	12 lbs/in	White/Blue			
IMF-B-35	35 lbs	2.20"	16 lbs/in	Purple			
IMF-B-50	50 lbs	2.20"	24 lbs/in	White/Red			
IMF-B-65	65 lbs	2.10"	31 lbs/in	Brown	2-3/4"	7/8"	5"
IMF-B-85	85 lbs	2.10"	40 lbs/in	White/Black			
IMF-B-115	115 lbs	2.00"	57 lbs/in	Silver			
IMF-B-150	150 lbs	2.00"	75 lbs/in	Orange			
IMF-B2-210	210 lbs	2.12"	99 lbs/in	Silver			
IMF-B2-290	290 lbs	2.00"	144 lbs/in	Blue			
IMF-B2-450	450 lbs	2.00"	224 lbs/in	Tan	2-3/4"	7/8"	5-3/8"

1-1/2" Minimum Deflection*



ACOUSTICAL | SURFACES, INC.

PAGE 2

Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com